



PS45 Pellet Stove

ENGINEERED AND BUILT BY PACIFIC ENERGY



HIGH PERFORMANCE


RELIABILITY

ENVIRONMENTALLY FRIENDLY



PS45 Pellet Stove

Warmland is the English translation of Cowichan, the name the indigenous people gave the valley where Pacific Energy has been building world class hearth products for over thirty years.

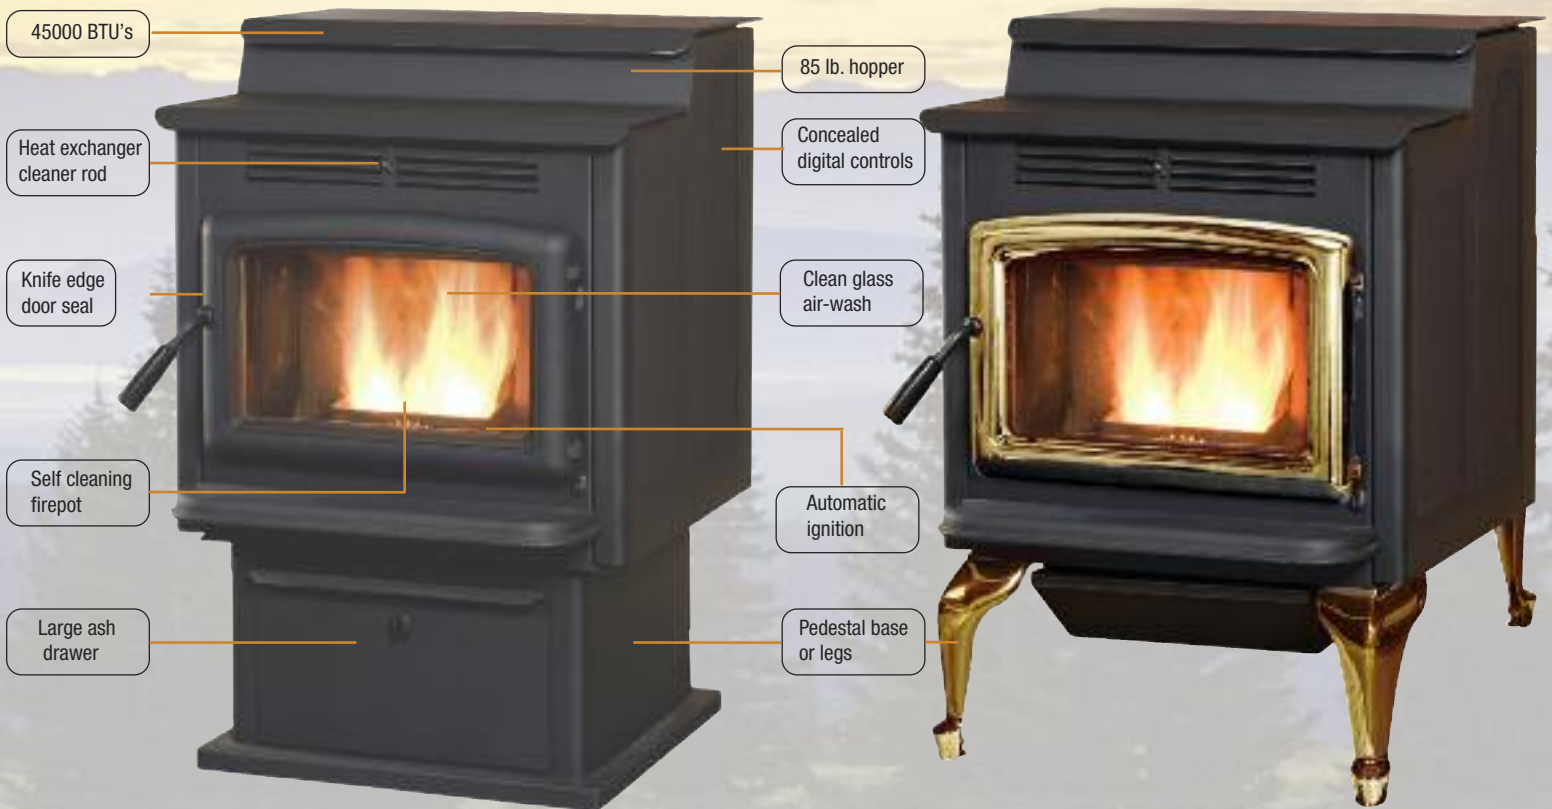


Features

- BTU range from 12,000 to 45,000
- 85 lb hopper minimizes refueling times
- Large ash drawer for convenient ash removal
- Automatic fuel ignition system
- Heavy duty heat exchanger for extended reliability
- 600 sq. inches of heat exchanger rectangular tubing for maximum heat output
- Built in heat exchanger cleaner
- Easy opening hopper lid with safely shut-off switch
- Choice of pedestal base or legs to match your décor
- Knife edge door seal ensures air tight firebox
- Low maintenance, sealed bearing 180 cfm variable speed blower for heat distribution
- 3 or 4 inch venting capability
- Limited Lifetime Warranty for peace of mind
- Mobile home approved

BTU Range	Low 12,000 High 45,000
Hopper Capacity	Up to 85 lbs
Efficiency (LHV)	87%
Emissions	1.84 gr/hr
Heating Capacity up to 2,000 sq.ft.	

Performance will vary with quality of fuel.

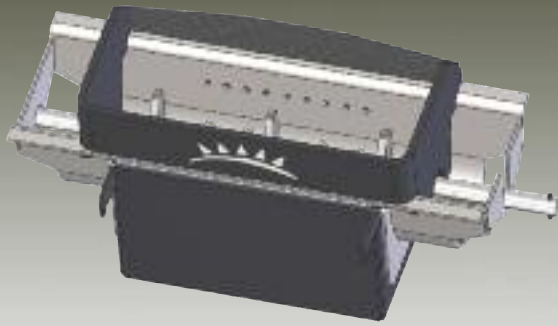

Self Cleaning Natural Flame Firepot

- Burns virtually any quality of wood pellets
- Automatic Firepot Cleaner
- Wider firepot delivers rich full flames



Concealed Digital Controls

- Easy access flip-down design
- Simple 3-mode operation control: automatic, Hi/Low, manual
- Optional wall thermostat capable operation



Dual Air Wash System

Clean glass airwash technology ensures your view of Warmland's signature robust flames.

Accessorize your Warmland Pellet Stove

- Choose either a pedestal or leg option
- Choose from 2 door styles
- Choose from 4 door finishes
- Choose from 4 leg finishes



GOLD



NICKEL



BRUSHED NICKEL




METALLIC BLACK






Dimensions of Unit

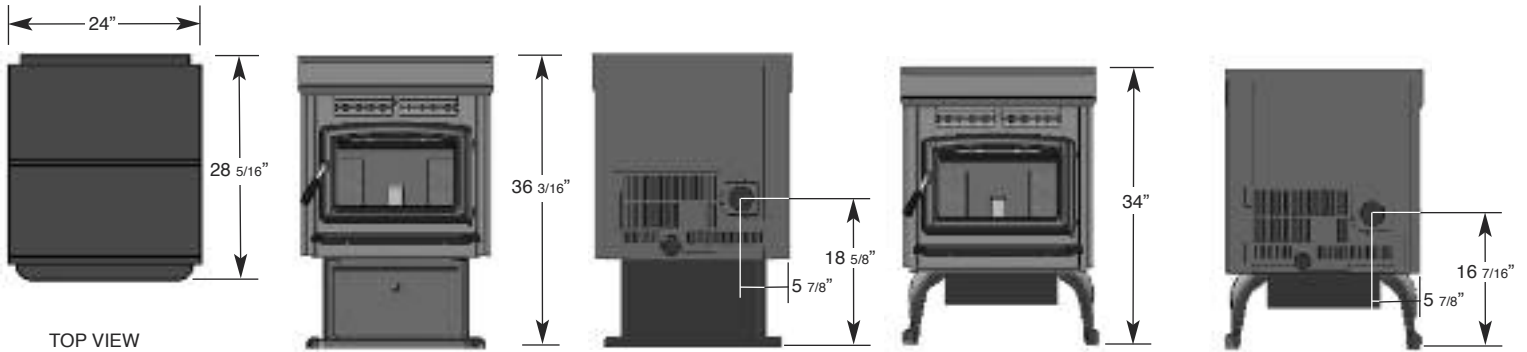


WEIGHT: 348 lbs.

Minimum Clearances to Combustible Materials

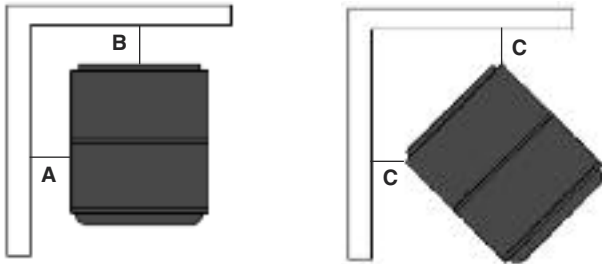

- A. Sidewall to Unit 6 in / 152 mm
- B. Backwall to Unit 3 in / 76 mm
- C. Corner to Unit 3 in / 76 mm

Minimum Non-combustible Floor Protection Distances



- D. 6 in / 152 mm
- E. 3 in / 76 mm
- F. 3 in / 76 mm

Limited Lifetime Warranty

For complete details visit www.pacificenergy.net



AUTHORIZED DEALER

