

Z-Flex's "Stainless Steel Liner Kit" offers you simple and economical solutions along with a large variety of choices. Line for gas, oil or pellet without insulation, simply add insulation and you're lining for wood. Z-Flex has a complete line of Kits and Accessories.

Kit:  
Pellet,  
Oil &  
Gas



Part # 02OILKIT \_\_\_ Dia. \_\_\_ Lgth. or  
Part # 02KT294C \_\_\_ Dia. \_\_\_ Lgth.

Diameter: 2"- 3"- 4"  
5"- 6"- 7"  
8"- 9"- 10"

Sizes Available: 2"  
to 24" in multiples of  
5' lengths.



**MODEL ZPOGK**

Kit:  
Solid Fuel



Part # 02ZFLKIT \_\_\_ Dia. \_\_\_ Lgth.

Diameter: 2"- 3"- 4"  
5"- 6"- 7"  
8"- 9"- 10"


Sizes Available: 2"  
to 24" in multiples of  
5' lengths.



**MODEL ZSFK**

**Flexible S/S Round**

ORDER #02ZLSSXX \_\_\_  
Dia. Lgth.  
ORDER #02ZL294C \_\_\_  
Dia. Lgth.



Diameter: 2"-3"-4"-5"-6"-7"-8"-9"-10"  
Sizes Available: 2" to 24" in multiples of 5' lengths  
*Prices for special items are available upon request. Allow 4-6 weeks for delivery.*

**3-Piece 45° Adjustable Elbow**


ORDER #02RE45XX - \_\_\_ Dia.



Dia.  
3"  
4"  
5"  
6"  
7"  
8"  
10"

**Double Wall Dripless Type A Connector**

ORDER #02CNNTRA - \_\_\_ Dia.



Dia.  
3"  
4"  
5"  
6"  
7"  
8"  
10"

*Used to mate Z-FLEX Liner to the T-Section, down-pipe or when going through a fireplace adaptor.*

**Liner Support**

ORDER #02ZRLSXX- \_\_\_ Dia.



Dia.  
3"  
4"  
5"  
6"  
7"  
8"  
10"

**Reducer**      **Increaser**

Reducer Dia.  
4" to 3"  
5" to 4"  
6" to 5"  
7" to 6"  
8" to 7"  
10" to 8"

Increaser Dia.  
3" to 4"  
4" to 5"  
5" to 6"  
6" to 7"  
7" to 8"  
8" to 10"

ORDER #02RD  
( )R ( )X  
e.g. 02RD4R3X  
(4" to 3")

ORDER #02IN  
( )I ( )X  
e.g. 02IN314X  
(3" to 4")



**Stainless Steel Chimney Flashing**

(Starter Collar 16" x 16" Base)


ORDER #02ZSCSXX- \_\_\_ Dia.



Dia.  
3"  
4"  
5"  
6"  
7"  
8"  
10"

**Dripless Type B Connector**

ORDER #02CNNTRB - \_\_\_ Dia.



Dia.  
3"  
4"  
5"  
6"  
7"  
8"  
10"

*Tapered to easily screw to the liner, enabling a dripless connection.*

**4-Piece 90° Adjustable Elbow**

ORDER #02RE90XX- \_\_\_ Dia.



Dia.  
3"  
4"  
5"  
6"  
7"  
8"  
10"

**Insulating Blanket w/Wrap and Gear Clamps**

ORDER #02INSKIT- \_\_\_ Dia.



*(Includes 2 gear clamps per 5' section)*

**Nose Cone**

ORDER #02NCXXX- \_\_\_ Dia.



Dia.  
3"  
4"  
5"  
6"  
7"  
8"  
10"

*A guide cone for installation of Z-Flex liner. Attach a 3/8" rope from the top of the chimney & pull the liner down. (Reusable)*

**Oval to Round Adaptor**

ORDER #02ZRORAX- \_\_\_ Dia.



Dia.: 6", 7", 8", 10"

**Round to Oval Adaptor**

ORDER #02ZRROAX- \_\_\_ Dia.



**Storm Collar**

ORDER #02ZRSTRM - \_\_\_ Dia.



Dia.  
3"  
4"  
5"  
6"  
7"  
8"  
10"

*To be used with mushroom cap as a rain guard.*

**Deluxe Rain Cap**

ORDER #02RNCAPS- \_\_\_ Dia.




Dia.  
3"  
4"  
5"  
6"  
7"  
8"  
10"

*The deluxe rain cap prevents deterioration caused by moisture entering the chimney. Includes storm Collar.*

**Stacking Tee w/Cap** (With removable Nose Spout)

ORDER #02ZRSTCX- \_\_\_ Dia.

Dia.-3", 4", 5", 6", 7", 8", 10"



*Note: Z-Flex Tees are designed to be used with both the Flex and Rigid Lining Systems. Use Type A Connector to attach Flex to Tee section.*

**Mushroom Cap**

ORDER #02ZRMCCX- \_\_\_ Dia.



Dia.  
3"  
4"  
5"  
6"  
7"  
8"  
10"

**Flexible S/S Oval to Round**

ORDER #02ZLSSOR- \_\_\_ Dia. \_\_\_ Lgth.



Dia.  
6"  
7"  
8"  
10"

*Available in 5' sections (1' Rd. 4' Oval)  
NOTE: To be used in those areas that are restrictive in one dimension. Oval accessories available.*

**Flexible S/S Full Oval**

ORDER #02ZLSSOX- \_\_\_ Dia. \_\_\_ Lgth.



Dia.  
6"  
7"  
8"  
10"

*Note: Oval Accessories Available Available in 5' and 10' sections*

**Z-FLEX**®

"An Investment in Quality"

Distributed By: \_\_\_\_\_

# Typical Flex-Liner Installation

Part #'s for  
6", 7" or 8" Installation

Part #'s for  
5" Liner Installation

BP-#RC

BP-#FL


BP-#LS

NOTE 1: If using a liner support, a storm collar is not required

NOTE 2: If not using a liner support, a storm collar must be used with flashing

BP-SS#X##

BP-#ACON

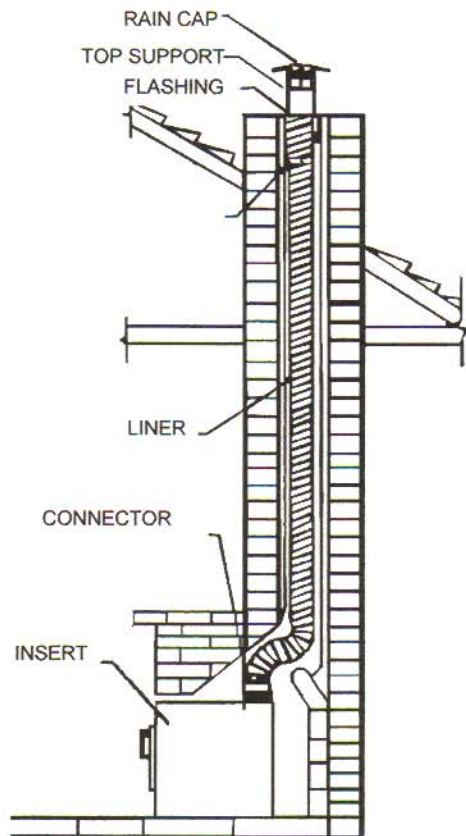

BP5RC

BP5FL

BP5LS

BPSS5X##

BP6-5R

Replace '#' with the liner diameter and/or length

"A" Connector is used to join flex to a component or the unit

"B" Connector is used to join two pieces of flex together